


Speed Controller

PSL




PSL (Rc 나사산)

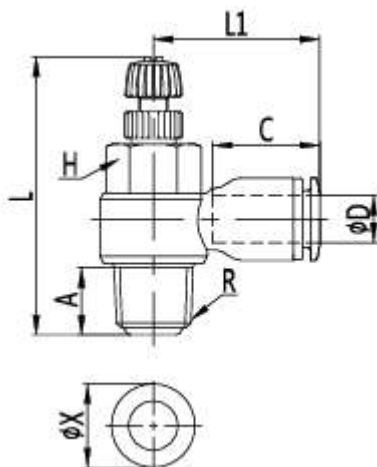

Model	Ød 외경	R 나사산	A	C	H	L min	L max	L1	ØX
PSL4-M5	4	M5	3.5	14.9	8	29	31.9	20	10
PSL4-01	4	R1/8	8.3	14.9	10	37.8	44.6	22.3	10
PSL4-02	4	R1/4	11.4	14.9	14	43.7	51.3	24	10
PSL6-M5	6	M5	3.5	15.4	8	29	31.9	21.7	12
PSL6-01	6	R1/8	8.3	15.4	10	37.8	44.6	22.9	12
PSL6-02	6	R1/4	11.4	15.4	14	43.7	51.3	24.9	12
PSL6-03	6	R3/8	12.7	15.4	19	48.6	55.5	26.6	12
PSL6-04	6	R1/2	15.8	15.4	24	52.7	59.5	29.6	12
PSL8-01	8	R1/8	8.3	17.3	10	37.8	44.6	25.3	14
PSL8-02	8	R1/4	11.4	18.3	14	43.7	51.3	28.4	14
PSL8-03	8	R3/8	12.7	18.3	19	48.6	55.5	29.3	14
PSL8-04	8	R1/2	15.8	18.3	24	52.7	59.5	32.3	14
PSL10-02	10	R1/4	11.4	20.5	14	43.7	51.3	32	17
PSL10-03	10	R3/8	12.7	20.5	19	48.6	55.5	32.5	17
PSL10-04	10	R1/2	15.8	20.5	24	52.7	59.5	35.5	17
PSL12-02	12	R1/4	11.4	21.6	14	43.7	51.3	32	20
PSL12-03	12	R3/8	12.7	21.8	19	48.6	55.5	35.3	20
PSL12-04	12	R1/2	15.8	22.3	24	52.7	59.5	36.3	20

PSL (G 나사산)

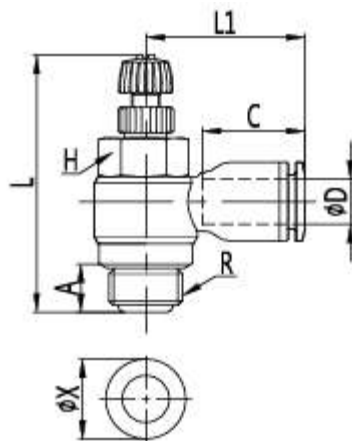

Model	Ød 외경	R 나사산	A	C	H	L min	L max	L1	ØX
PSL4-M5	4	M5	3.5	14.9	8	29	31.9	20	10
PSL4-G01	4	G1/8	6	14.9	10	37.5	44.3	22.3	10
PSL4-G02	4	G1/4	8.3	14.9	14	43.7	51.3	24	10
PSL6-M5	6	M5	3.5	15.4	8	29	31.9	21.7	12
PSL6-G01	6	G1/8	6	15.4	10	37.5	44.3	22.9	12
PSL6-G02	6	G1/4	8.3	15.4	14	43.7	51.3	24.9	12
PSL6-G03	6	G3/8	9.5	15.4	19	48.4	55.3	26.6	12
PSL6-G04	6	G1/2	13	15.4	24	52.7	59.5	29.6	12
PSL8-G01	8	G1/8	6	17.3	10	37.5	44.3	25.3	14
PSL8-G02	8	G1/4	8.3	18.3	14	43.7	51.3	28.4	14
PSL8-G03	8	G3/8	9.6	18.3	19	48.4	55.3	29.3	14
PSL8-G04	8	G1/2	13	18.3	24	52.7	59.5	32.3	14
PSL10-G02	10	G1/4	8.3	20.5	14	43.7	51.3	32	17
PSL10-G03	10	G3/8	9.5	20.5	19	48.4	55.3	32.5	17
PSL10-G04	10	G1/2	13	20.5	24	52.7	59.5	35.5	17
PSL12-G02	12	G1/4	8.3	21.6	14	43.7	51.3	32	20
PSL12-G03	12	G3/8	9.5	21.8	19	48.4	55.3	35.3	20
PSL12-G04	12	G1/2	13	22.3	24	52.7	59.5	36.3	20